



The K1500B/K1500B-A bandpass sub-bass system is designed to be used with large scale K300 and K380 karaoke systems to extend and increase the total low frequency output power. It provides good mid-bass punch with extended sub-bass output from a 15" driver with 3" high temperature resistant voice coil.

It is ranked as entry level in LAX product line.

However, to ensure its durability and simplicity, the high standards of LAX sound regulating technology applied to this K1500B/K1500B-A.


K1500B/K1500B-A is 15" labyrinth passive/active subwoofer enclosed with 15mm MDF.

## Applications

- ◆ Live club performance
- ◆ Club installations
- ◆ KTV

## Specifications

	K1500B
Frequency response	62Hz-250kHz(±3dB)
Drivers	1X15"(380mm)bass drivers
Power rated(RMS)	400W , 1200W peak
SPL	123dB continuous,129 dB peak
Sensitivity(1w/1m)	96dB
Nominal Impedance	8 ohm
Pole mount	1XTop pole mount
Dimensions	651mmX436mmX514mm
Weight	37kg
Recommended AMP	D6/R806

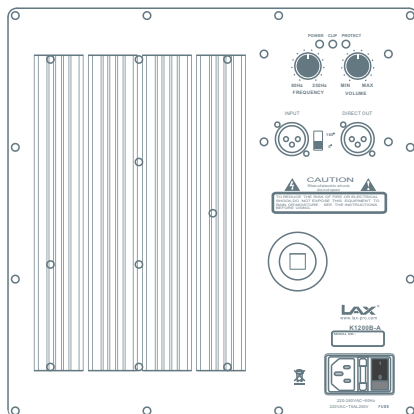

## Specifications

	K1500B-A
Frequency response	42Hz-250kHz(±3dB)
Drivers	1X15"(380mm)bass drivers
Power rated(RMS)	500W , 1400W peak
SPL	123dB continuous,129 dB peak
Sensitivity(1w/1m)	95dB
Nominal Impedance	8 ohm
Pole mount	1XTop pole mount
Dimensions	436mmX514mmX651mm
Weight	45kg

